


## **SPECIFICATIONS**

| Size                                 | Metric            | British              |
|--------------------------------------|-------------------|----------------------|
| Max. Working Height                  | 16.27m            | 53ft 4in             |
| Max. Platform Height                 | 14.27m            | 46ft 10in            |
| Max. Operating Range(+0.6m)          | 8.69m             | 28ft 6in             |
| Max. Platform Range                  | 8.09m             | 26ft 6in             |
| Flatbed Transport Dimensions (L×W×H) | 5.17m×2.44m×2.58m | 16ft11in×8ft×8ft 5in |
| Standard Container Transport         | All Applicable    | All Applicable       |
| Platform Size(Length×Width)          | 1.83m×0.79m       | 6ft×2ft 7in          |
| Turntable Tailswing                  | 0                 | 0                    |
| Ground Clearance                     | 0.31m             | 1ft                  |
| Wheelbase <b>B</b>                   | 2.40m             | 7ft 10in             |
| Turning Radius(Inside/Outside)       | 3m/4.73m          | 9ft 10in/15ft 6in    |
| Tyres                                | 315/55 D20        | 315/55 D20           |
| Max. Up And Over Clearance           | 7.30m             | 23ft 11in            |
| Max. Down Probing Depth              | 0.42m             | 1ft 4in              |

| Performance          |                |                |
|----------------------|----------------|----------------|
| S.W.L                | 320kg          | 705lb          |
| Max. Occupants       | 2              | 2              |
| Gradeability         | 40%            | 40%            |
| Travel Speed(Stowed) | 6.0km/h        | 3.7mph         |
| Travel Speed(Raised) | 1.1km/h        | 0.7mph         |
| Max. Working Slope   | X-5°/Y-5°      | X-5°/Y-5°      |
| Turret Rotation      | 360°Continuous | 360°Continuous |
| Platform Rotation    | 180°           | 180°           |
| Jib Movement         | 132°           | 132°           |
|                      |                |                |

| Weight         |        |         |
|----------------|--------|---------|
| Overall Weight | 7850kg | 17306lb |

| Kubota D1105/18.2kW | Kubota D1105/18.2kW |
|---------------------|---------------------|
| 115L                | 30gal               |
| 145L                | 38gal               |
|                     |                     |

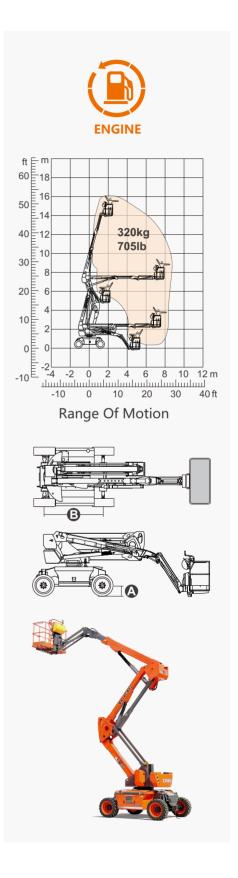







## **FEATURES**

## **Standard Items**

- 1.50m (4ft 11in) Jib
- Front Oscillating Axle
- Two-Wheel Steering
- Four-Wheel Drive
- Self-Leveling Platform
- 180° Left And Right Swing Platform
- Proportional Joystick Controls
- Thumb Rocker Steer
- Drive Enable
- Ac Power Cord To Platform
- Tilt Alarm
- Descent Alarm
- Flash
- Horn
- Hour Meter
- Integral Integrated Special Drive Axle For Construction Machinery
- 360° Continuous Turntable Rotation
- Positive Traction Four Wheel Drive
- Platform Load Sense System
- Fault Diagnosis System
- Operator Anti-crushing Protection System
- Harsh Environment Kits
- 12V DC Auxiliary Power
- Kubota D1105 18kW 2600rpm Diesel Engine
- Hydraulic Oil Radiator
- Anti-restart Engine Protection
- Anti-reverse Engine Device
- Auto Engine Fault Shutdown











**Articulated** Boom-BA

Working Height-16m

Diesel Engine

Rough Terrain-RT



## ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deging, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











