

EGS120-8

Open Type



This is an imaged picture.
The radiator shall be changed.

EGS120BS-8

Bonnet & Soundproof & Portable Type



RATED OUTPUT

Frequency	50Hz (1,500 rpm)		60Hz (1,800 rpm)		
	Prime	Standby	Prime	Standby	
Rated Output	kVA	100	110	118	129
	kW	80	88	94	103
*Rated Voltage	380/220V, 400/231V, 415/240V		440/254V, 460/266V, 480/277V		

* Rated Voltage : Line to Line / Line to Neutral

DESIGN FEATURES

- **Komatsu Diesel Engine**
 - High Quality, Reliability and Durability
 - High Output and Low Fuel Consumption
 - Light Weight and Compact Design
 - Low Noise and Low Vibration
 - Easy Maintenance
- **Proven Performance & Technology**
Komatsu EGS series diesel generator sets, the combination of Komatsu engine and reliable alternator, are manufactured under strict quality control standards.
- **Generator Control Panel**
EGS series generator sets have a compact and intelligent generator control module, which provides all the safety protections and its window displays both the AC and DC digital measurements.

CONDITIONS & DEFINITIONS

- **Prime Power Rating :**
Prime power is applicable for supplying electric power at variable load for an unlimited number of hours per year.
A 10% additional power is provided for governing purpose.
Average of variable load shall not exceed 70% of the prime power rating.
This rating is set in accordance with ISO 8528.
- **Standby Power Rating :**
Standby power is applicable for supplying emergency power at variable load in areas where reliable utility is available.
The total operating time at variable load shall not exceed 200 hours per year and the total operating time at Standby power shall not exceed 25 hours per year.
This rating is set in accordance with ISO 3046-1, DIN6271 and BS 5514.

SPECIFICATIONS

ENGINE

- **Model : Komatsu SAA6D102E-P130**
- **Rated Output, Net (With Fan)**

Eng. Speed	1,500 rpm (50Hz)		1,600 rpm (60Hz)		
	Prime	Standby	Prime	Standby	
Rated Output	HP	131	144	155	170
	kW	98	107	115	127

- **Fuel Consumption (Approximately)**

Hz	Load, %	25%	50%	75%	100 %
50	Generator, kVA	25	50	75	100
	Fuel, Liter/H	7.9	13.0	20.3	25.7
60	Generator, kVA	30	59	89	118
	Fuel, Liter/H	8.9	14.2	23.6	31.9

Type ----- 4-stroke Cycle, Water Cooled, Overhead Valve, Direct Injection

Speed Regulation --- Droop within 5% (Mechanical Governor)

Aspiration ----- Turbocharged

Cylinder Arrangement · 6 in-line

Bore x Stroke ----- 102 mm x 120 mm

Piston Displacement - 5.88 liters

Starting Method ----- Electric Motor, 24V - 4.5 kW x 1

Charging Alternator --- DC24V-25A (with Brush)

Lubrication ----- Forced Lubrication by Gear Pump

Lube Oil Filter ----- Full-flow, Spin On/Off Type Cartridge

Fuel Oil Filter ----- Spin On/Off Type Cartridge

Air Cleaner ----- Dry, Cyclopac 2 Stages of Paper Element with Dust Evacuator Valve

Oil Capacity ----- Oil Pan (H/L) : 20/15 liters
System Total : 22 liters

Coolant Capacity ----- Engine : 9 liters
Radiator : 13 liters

ALTERNATOR

Rated Power Factor ----- 0.8

Excitation ----- Self Excited, Brushless

Cooling ----- Self Ventilation

Automatic Voltage Regulator - Equipped in Alternator

Number of Pole ----- 4

Rotor Supporting Type ----- Single Bearing

Degree of Protection ----- Screen Protected (IP23)

Number of Wire ----- 3-Phase / 4-Wires

Insulation Class ----- Class H

Insulation Resistance ----- More than 3 Mohms
 Voltage Regulation ----- ± 1.0 %
 Total Harmonic, TGH / THC -- < 4%
 Waveform, NEMA = TIP ----- < 50
 Waveform, IEC = THF ----- < 2%

APPLICABLE CONDITIONS

Ambient Temperature : 0 ~ 40 °C
 Altitude : Maximum 1,000 m
 Ambient Humidity : Under 80 %

DIMENSIONS

Unit : mm

EGS120-8 Open Type


Weight : Approx. 1,400 kg



L 2,400 × W 950 × H 1,550

EGS120BS-8 Bonnet and Soundproof and portable Type

Weight : Approx. 2,400 kg

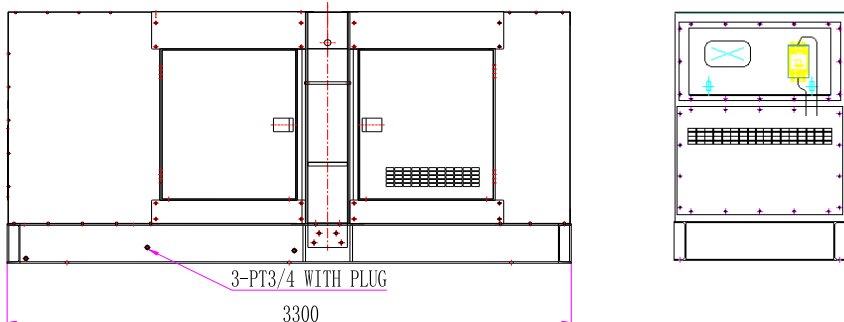

L 3,300 × W 1,100 × H 1,600

STANDARD / OPTIONAL ACCESSORIES

● : Standard ○ : Optional

Generator Set		
Main components mounted on the skid base. (Engine, Alternator, MCCB, Control Panel and Lead Acid Battery)		●
Rated Voltage : AC 200V or 220V class		○
Engine		
Engine Stop Method : Energized in run mode (Electric Stop Solenoid is mounted to the Fuel Lever)		●
Muffler	Industrial (Open Type)	●
	Residential (Bonnet and Soundproof Type)	●
	Residential (Open Type)	○
Corrosion Resistor and Water Separator		●
Engine Speed Control System		
Fixed Lever Type		●
Electronic Speed Controller and Actuator		○
Cold Starting Aid		○
Alternator		
Anti-condensation Heater		○
Control Components		
Generator Control Module		●
Automatic Start / Stop Type		
Mode Switch : OFF / AUTO / MAN		
Built-in AC and DA Digital Measurements		
Basic Icon for Annunciation		
Built-in AMF Function		
Capable for Remote Signal, Monitoring and Control System (Remote Control cable is optional)		
Engine Oil Temperature Gauge		○
Analogue Tachometer (Magnetic Pick Up Type)		○
Emergency Stop Push-button		●
MCCB	Shunt Trip Coil	●
	Under Voltage Trip Type	○
Voltage Trimmer (Potentiometer)		○
Battery Charger		○
Fuel Tank		
Skid Base Tank Type(Open Type)		○
Skid Base Tank Type(BS Type) 200L		●
Self-Standing Tank Type		○
Control System		
Synchronizing Panel		○
Self-Standing ATS Panel		○

Materials and specifications are subject to be changed without notice.

